




# Toshiba A1304T Mini LCD Screen Replacement

Written By: Christopher

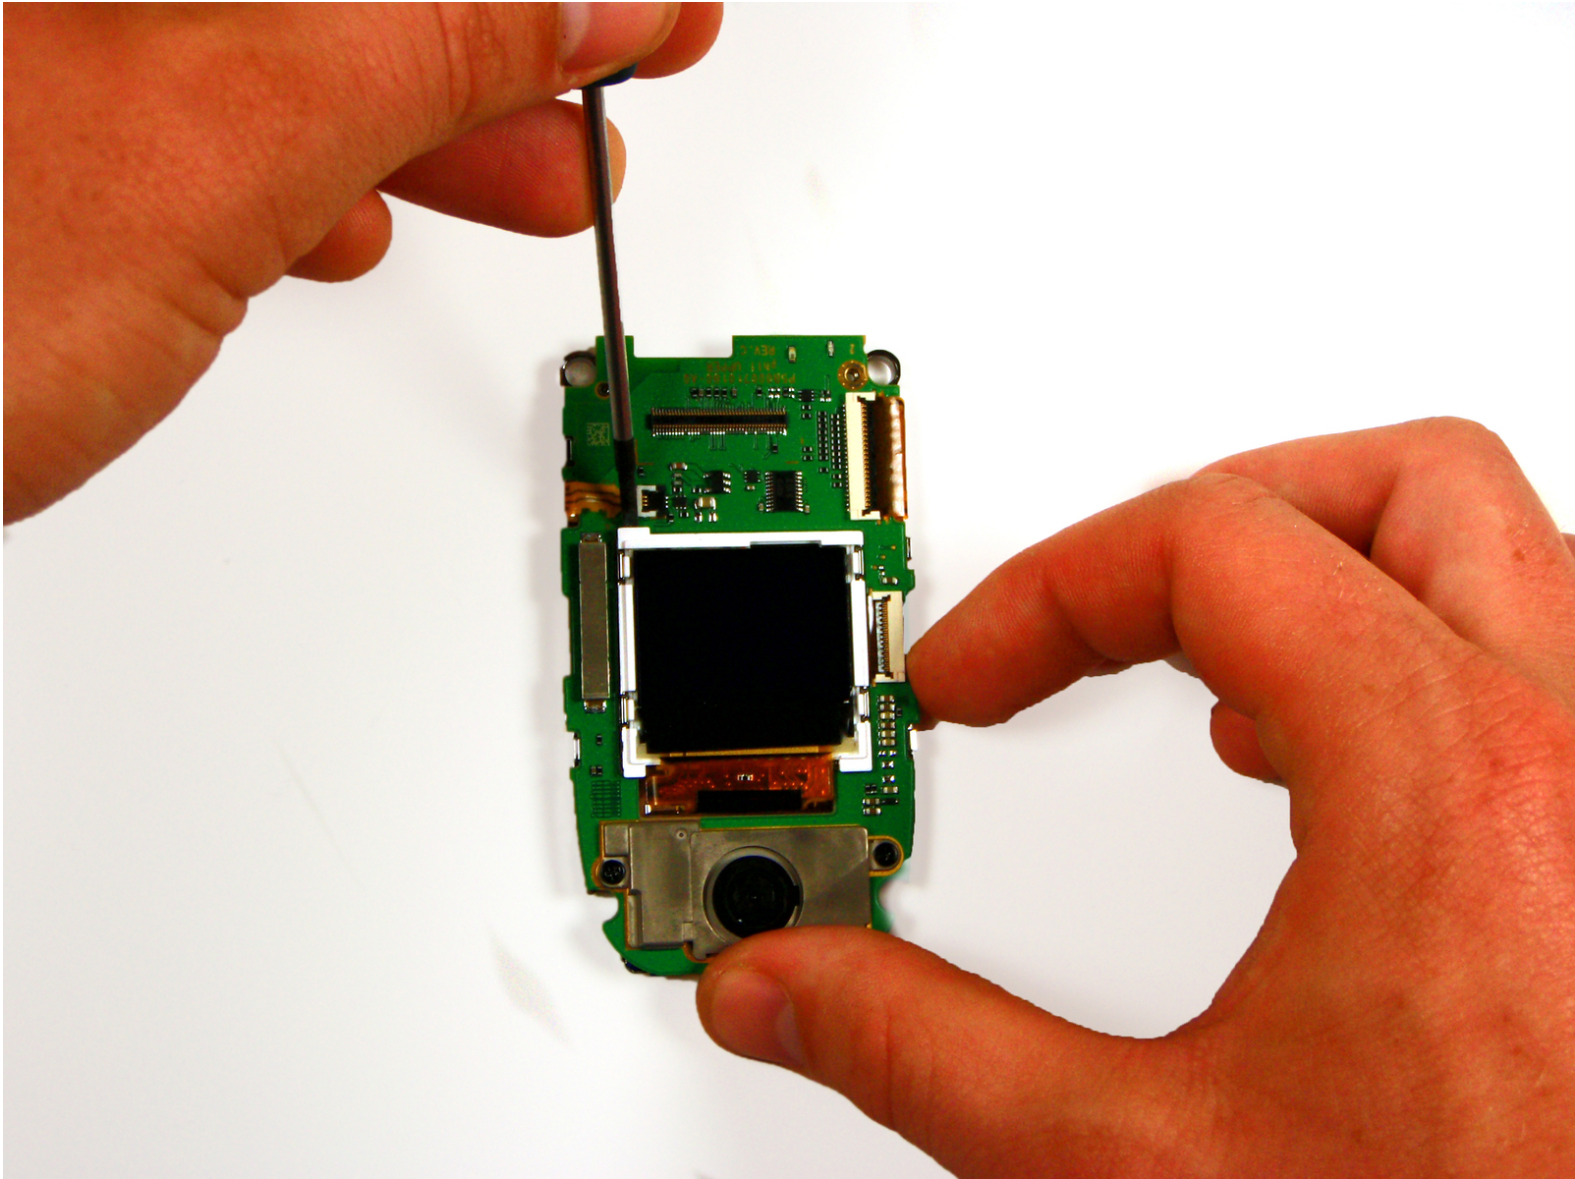

## INTRODUCTION

Use this guide to replace the mini front LCD screen.



### TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [T8 Torx Security Bit Screwdriver](#) (1)



### PARTS:

- [Toshiba A1304T Mini LCD Screen](#) (1)

## Step 1 — Front Cover



- Open the phone so that it matches the photos to the left.
- Using a thumb-tack, push-pin, or similar pin, remove the four plastic stoppers located around the main LCD screen.

## Step 2



- With the T8 Torx Security Bit Screwdriver, remove the four screws in the designated locations.
- ⓘ The T8 Torx Security Bit Screwdriver can be substituted with a small flathead screwdriver. Screw removal may be slightly more difficult however.



## Step 3



- Insert the head of a flathead screwdriver into the seam between the front cover and the phone.
- Pry gently until the cover gives slightly to create a slightly wider opening. You may hear a distinct pop as you pry.
- Remove the screwdriver and re-insert it into another portion of the seam. Continue making gaps around the cover of the phone until it is completely detached from the body.





## Step 4 — Mini LCD Screen

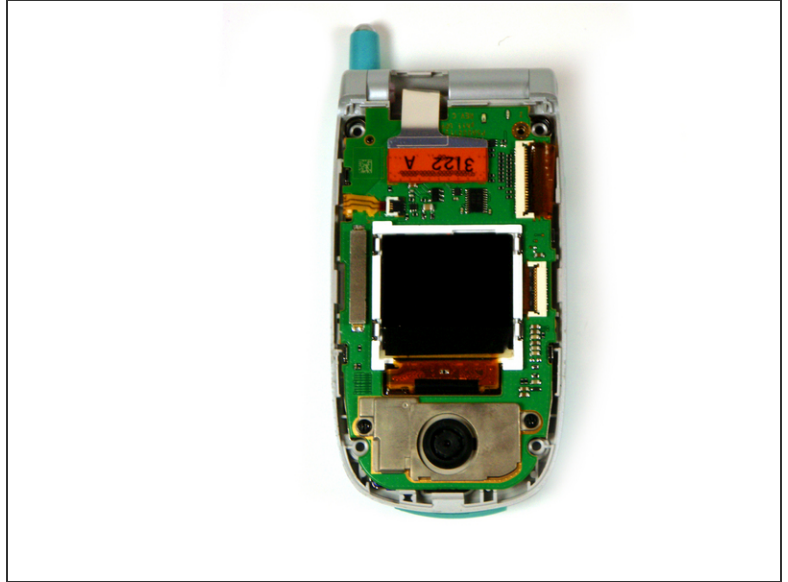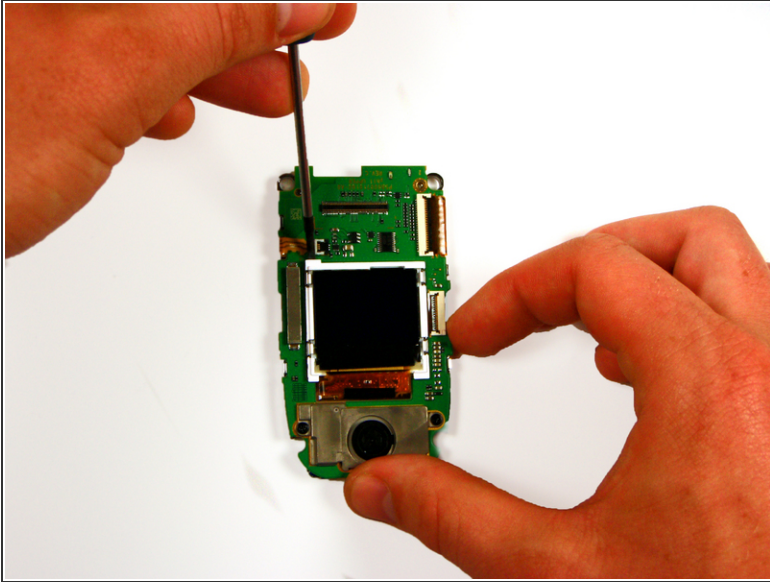

- Using a small Phillips screwdriver, gently pry off the LCD screen from the board.

## Step 5

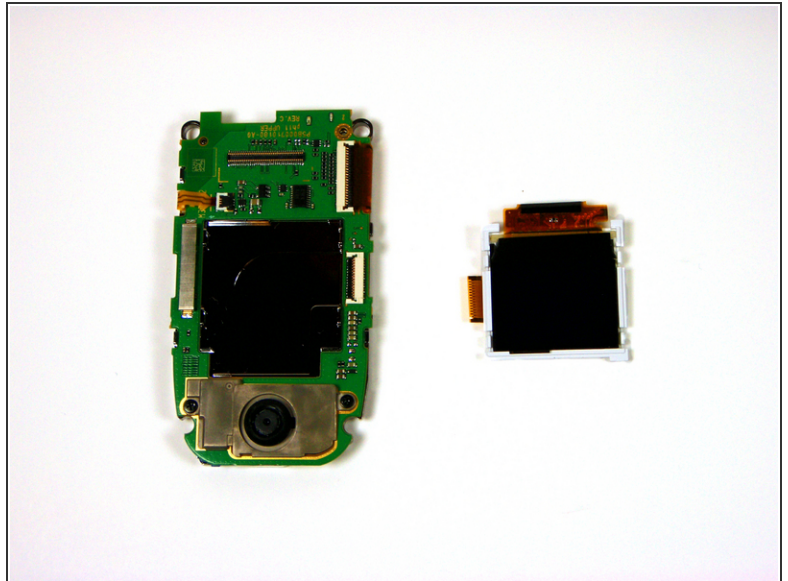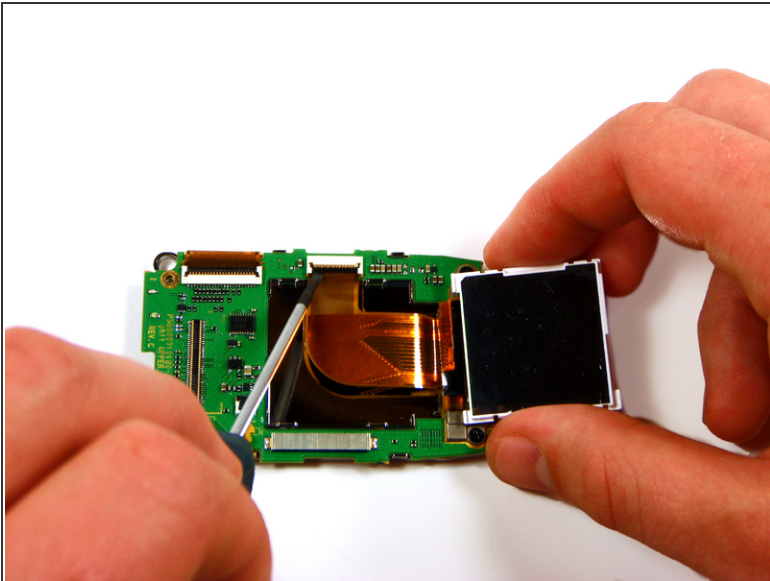

- Using the head of the screwdriver, flip up the black tab connecting the ribbon-wire.
- Gently pull the LCD screen away from the board, the cable should come off with nearly no resistance.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 02:24:42 PM.